

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/037025 A2

- (51) International Patent Classification⁷: A24D 3/04 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/GB2003/004409
- (22) International Filing Date: 13 October 2003 (13.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0224665.0 23 October 2002 (23.10.2002) GB
- (71) Applicant (*for all designated States except US*): FILTRONA INTERNATIONAL LIMITED [GB/GB]; 110 Park Street, London W1Y 3RB (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): CLARKE, Paul, Francis [GB/GB]; 25 Turners Way, Morpeth, Northumberland NE61 2YE (GB).
- (74) Agent: GEERING, Keith, Edwin; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SMOKERS FILTER

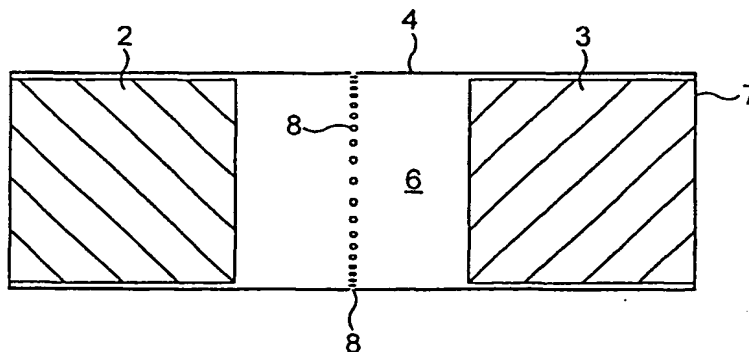

(57) Abstract: A tobacco smoke filter which has a tar retention of at most 50% and comprises a relatively high draw resistance downstream filtering plug (2) of at most 50% tar retention, a relatively low draw resistance upstream filter plug (3) of at most 22% tar retention spaced longitudinally upstream therefrom, and a filter wrapper (4) engaging around and joining the spaced plugs to define a cavity (6) therebetween.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/037025 A3

(51) International Patent Classification⁷: **A24D 3/04**

(21) International Application Number:
PCT/GB2003/004409

(22) International Filing Date: 13 October 2003 (13.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0224665.0 23 October 2002 (23.10.2002) GB

(71) Applicant (for all designated States except US): **FIL-TRONA INTERNATIONAL LIMITED** [GB/GB]; 110 Park Street, London W1Y 3RB (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CLARKE, Paul, Francis** [GB/GB]; 25 Turners Way, Morpeth, Northumberland NE61 2YE (GB).

(74) Agent: **GEERING, Keith, Edwin**; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:
19 August 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SMOKERS FILTER**

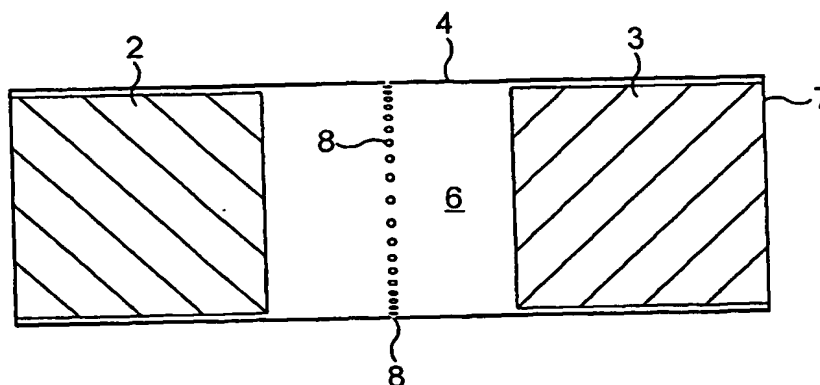

(57) Abstract: A tobacco smoke filter which has a tar retention of at most 50% and comprises a relatively high draw resistance downstream filtering plug (2) of at most 50% tar retention, a relatively low draw resistance upstream filter plug (3) of at most 22% tar retention spaced longitudinally upstream therefrom, and a filter wrapper (4) engaging around and joining the spaced plugs to define a cavity (6) therebetween.

SMOKERS FILTER

The present invention relates to tobacco smoke filters, especially for cigarettes.

Some conventional filter cigarettes have a CO/Tar
5 delivery ratio (each measured in mg per cigarette) of a
little less than unity, though this ratio is more usually
unity or greater. Tar is herein defined as Particulate
Matter, Water- and Nicotine-free (PMWNF). It is very
desirable to reduce CO delivery, but prior measures aimed
10 at achieving this have resulted in unsatisfying taste
delivery and/or in unsatisfactory draw performance,
and/or have involved expensive filter structures.

Applicants have now surprisingly found that reduced
CO delivery and reduced CO/tar delivery ratio with
15 maintained smoker satisfaction can be provided by using
a simple and cheaply constructed low tar retention filter
having a relatively high draw resistance low tar
retention downstream filtering plug, a relatively low
draw resistance low tar retention upstream filtering plug
20 spaced longitudinally upstream therefrom, and a filter
wrapper engaged around and joining the spaced filtering
plugs and defining a ventilated cavity therebetween.

The present invention provides a tobacco smoke filter which has a tar retention of at most 50% and comprises a relatively high draw resistance downstream filtering plug of at most 50% tar retention, a relatively low draw resistance upstream filter plug of at most 20% tar retention spaced longitudinally upstream therefrom, and a filter wrapper engaging around and joining the spaced plugs to define a cavity therebetween. The terms "relatively high" and "relatively low" are used to mean that the downstream plug draw resistance is higher than that of the upstream plug. The tar retention of the upstream plug is preferably less than that of the downstream plug. The downstream filtering plug preferably extends to the buccal end face of the filter. The upstream filtering plug preferably extends to the upstream end face of the filter. The cavity may contain particulate additive, e.g. particulate sorbent, preferably activated carbon.

In a filter cigarette according to the invention such a filter is joined to a wrapped tobacco rod with the upstream filter end towards the tobacco, and the cavity is ventilated - i.e. a pathway is provided for external ventilating air to pass laterally into the cavity. The filter may for example be joined to the wrapped tobacco

rod by ring tipping (which engages around just the adjacent ends of filter and rod to leave much of the filter wrapper exposed) or by a full tipping overwrap (which engages around the full filter length and the adjacent end of the rod).

The filter wrapper of the filter per se, before incorporation in a filter cigarette, may be a ventilating wrapper (which provides a pathway for the passage of external ventilating air laterally therethrough into the cavity) or it may be non-ventilating. The filter wrapper may have one or more air-permeable regions in register with the cavity, or it may be wholly of air-impermeable or inherently air-permeable material; in each of these cases the filter wrapper may have one or more ventilating holes or apertures (e.g. perforations) around the cavity, but this is optional and in many instances an apertured filter wrapper is not necessary for the unattached filter per se. Where the unattached filter has a filter wrapper of air-impermeable material and is to be used in conjunction with a full tipping overwrap of inherently air-permeable material, then it could be most convenient for the filter wrapper of the unattached filter to have one or more apertures in register with the cavity; this is not the most preferred arrangement, however, and more

usually the filter wrappers of the unattached filters will not have ventilating apertures. Thus when the filter wrapper is of inherently air-permeable material, ventilating apertures (though not precluded) are usually unnecessary; and where an apertured filter wrapper is
5 required, it will frequently be preferred to form the or each ventilating hole in the filter wrapper only during or after attachment of the preformed filter to a wrapped tobacco rod in production of the filter cigarette
10 according to the invention.

In filter cigarettes according to the invention the wall around the cavity (e.g. the filter wrapper when ring tipping is used, or the combination of filter wrapper and tipping overwrap) must be ventilating - i.e. provide a
15 pathway for the passage of external ventilating air laterally therethrough into the cavity. A tipping overwrap in a filter cigarette according to the invention must thus be a ventilating overwrap around a ventilating filter wrapper; the tipping overwrap may for example have
20 one or more air-permeable regions or be wholly of inherently air-permeable material, and/or it may have one or more ventilating holes or apertures (e.g. perforations); and a ventilating pathway thus provided through the tipping overwrap should of course be in

register with a ventilating pathway through the filter wrapper and with the cavity.

In one preferred embodiment of filter cigarette according to the invention the filter wrapper is of inherently air-permeable material, and an apertured (e.g. perforated) tipping overwrap, with one or more holes around the cavity, is employed to incorporate the filter in a filter cigarette. Another preferred embodiment uses a tipping overwrap with no ventilating holes to join a wrapped tobacco rod to a filter according to the invention having a filter wrapper with no ventilating holes, and coinciding holes or apertures (e.g. perforations) around the cavity are formed simultaneously through both overwrap and underlying filter wrapper to provide for ventilation into the cavity

Ventilating perforations when present in a filter wrapper and/or tipping overwrap will usually be distributed in one or more rows extending longitudinally of or around the cavity, but other arrangements are possible, and ventilation can be augmented (or provided instead) by larger holes or apertures of any arrangement or distribution.

The filter may be of conventional length - e.g. from 25 to 30 mm. The cavity may for example be from 5 to 10 mm long. The downstream filtering plug may be of about the same length as the upstream filtering plug (e.g. about 10 mm), but the upstream plug could be the shorter of the two.

The pressure drop (PD) - also termed draw resistance (DR) - of the downstream filtering plug can for example be from 40 to 130 mm water gauge (WG), preferably from 60 to 110 mm WG, e.g. about 90 mm WG. The tar retention of the downstream filter plug is preferably from 30 to 50%, more preferably from 35 to 45%, e.g. about 40%. The pressure drop of the upstream filtering plug can for example be up to 20 mm WG, preferably from 8 to 16 mm WG, e.g. about 12 mm WG. The tar retention of the upstream filtering plug is up to 22%, preferably from 14 to 20%, e.g. about 18%.

The downstream filtering plug is preferably of bonded filamentary tow and its required performance can be obtained by using high denier filaments (for low retention) and high total denier tow (for high pressure drop per unit length). Filamentary cellulose acetate tow is preferred, suitably of a filament denier of at least

5 (e.g. 7 or 8 or 9) and a total tow denier of 70 to 80
x 10³ (e.g. about 75 x 10³). An NWA (non-wrapped acetate)
filtering plug is preferred - made, for example, as
described in GB-A-1,169,932. Other fibrous and non-
5 fibrous downstream filtering plug materials and
structures can however be used (e.g. a plug of staple
fibres or cellular plastics material or a plug of
plastics - e.g. HDPE - fibres or filaments) provided that
they have appropriate low retention and high draw
10 resistance.

The upstream filtering plug may also be of
filamentary tow, which may be of high denier filaments.
Filamentary cellulose acetate tow is preferred, suitably
of a filament denier of at least 5 (e.g. about 9) but
15 with a total tow denier much less than (e.g. about half)
that of the downstream plug so as to ensure the required
lower pressure drop; the total denier of the upstream
plug tow is for example from 35 to 40 x 10³. A preformed
WA (wrapped acetate) upstream filter plug is preferred.
20 Other fibrous and non-fibrous upstream filter plug
materials and structures can however be used (e.g. a plug
of staple fibres or cellular plastics material or a plug
of plastics - e.g. HDPE - fibres or filaments) provided
that they give appropriate low retention and low draw

resistance.

The degree of ventilation can be chosen according to the other details of the structure and the performance required of the final product, but will normally be high
5 - e.g. from 50 to 75% or higher.

Commercially viable filters according to the invention giving satisfactory taste and draw performance in filter cigarettes can provide low CO delivery (usually less than 5 mg per cigarette compared to the value of
10 about 6 mg per cigarette usually delivered by conventional ventilated filter cigarettes) and a low CO/Tar delivery ratio (usually less than 0.7 and preferably as low as 0.6 or less, compared to the usual value of about 1 for conventional ventilated filter
15 cigarettes).

The filters according to the invention may be made by a continuous in-line single pass procedure. In this procedure upstream and downstream plugs are fed alternately at a constant spacing onto a continuously
20 supplied and longitudinally advanced ribbon of filter wrapper material and the ribbon and plugs thereon are continuously passed into and through a garniture which

forms the assembly into a continuous rod of spaced plugs within the cylindrical wrapper which is secured by a lapped and stuck seam. The initial continuous rod as it issues continuously from the machine outlet is cut into
5 finite lengths for subsequent use. This cutting may be into individual filters as defined and described above, each of which is then attached to an individual wrapped tobacco rod to form a filter cigarette. More usually, however, the continuously issuing rod is first cut into
10 double or higher multiple (usually quadruple or sextuple) lengths for subsequent use; when the initial cut is into quadruple or higher lengths, then the latter are subsequently cut into double lengths for the filter cigarette assembly - in which the double length filter
15 rod is assembled and joined (by ring tipping or full tipping overwrap) between a pair of wrapped tobacco rods with the combination then being severed centrally to give two individual filter cigarettes. For this purpose in the present invention the filter plugs in the initial
20 continuously produced rod are double the lengths of the plugs of the eventual individual filters. The continuous rod and the multiple lengths cut from it have individual filters according to the invention integrally joined end-to-end in mirror image relationship, and the double
25 length rod for the mentioned filter cigarette assembly

has a double length downstream plug between opposed
single length cavities closed at their distal ends by
respective single length upstream plugs, the cut to make
the individual filter cigarettes being made laterally
5 midway through the central double length plug. The
invention includes the described production procedure and
the double and higher multiple length filter rods made
thereby.

In the accompanying drawings Figs. 1 and 2
10 respectively are schematic sectional side elevation
views, not to scale, of an individual filter and filter
cigarette according to the invention; and Fig. 3 is a
similar view of a multiple length rod according to the
invention showing how it may be cut to form multiple and
15 eventually individual filter lengths of the invention.

The Fig.1 filter has a cylindrical buccal end
filtering plug 2 which is of relatively high draw
resistance (pressure drop) and low tar retention, a
cylindrical upstream filtering plug 3 which is of
20 relatively low draw resistance (pressure drop) and low
tar retention, and a filter wrapper 4 engaged around the
plugs to form a cavity 6 therebetween.

Purely for the purpose of illustrating an optional feature (the use for the unattached filter per se of an apertured filter wrapper), the filter wrapper 4 of Fig.1 is shown as having a ring of ventilating perforations 8 therethrough around the cavity 6. In most instances, however, the filter wrapper 4 of the unattached filter will be without any ventilating apertures; thus when the filter wrapper 4 is of inherently air-permeable material it usually need not be apertured, and when an apertured filter wrapper is desired or necessary for the filter cigarette the perforation or other hole formation may best be performed only after assembly of the preformed filter with a wrapped tobacco rod.

Fig.2 shows a filter of the Fig.1 type joined at its upstream end 7 to a tobacco rod 10 in its own wrap 11 by means of a full tipping overwrap 12 which surrounds and engages the full length of the filter and the adjacent end only of the wrapped tobacco rod 10, 11. Tipping overwrap 12 is shown as having a ring of ventilating perforations 14 around cavity 6 in register with ventilating perforations 8 through filter wrapper 4. When filter wrapper 4 is of inherently air-permeable material, perforations 8 may be unnecessary and absent, with perforations 14 being formed in overwrap 12 before

assembly of the filter cigarette. When both perforations 8 and 14 are present, they are most conveniently formed simultaneously through filter wrapper 4 and tipping overwrap 12 only after assembly of the filter cigarette,
5 so that perforations 8 and 14 coincide.

The filter of Fig.1 might alternatively be attached to wrapped tobacco rod 10, 11 by ring tipping which extends only around the adjacent ends of the filter and tobacco rod, so that most of filter wrapper 4 is directly
10 exposed to atmosphere. Filter wrapper 4 would then usually be of air-permeable material, and/or provided with one or more apertures around cavity 6 (before or after filter cigarette assembly), to give ventilation into cavity 6.

15 Fig.3 illustrates multiple length filter rods according to the invention. For Fig.3 a multiple length filter rod is made continuously as described above; this filter rod continuously emerging longitudinally from a production machine outlet (not shown) to the right of
20 Fig.3 has plugs 2' and 3' double the length of above eventual individual filtering plugs 2 and 3, spaced apart in filter wrapper 4 by cavities 6 the same length as those of the eventual individual filters 6. Lines B mark

the leading edge of the illustrated sextuple length filter rod, and lines B' the position for its trailing edge and also the location of a cutting device (not shown) downstream of said machine outlet. The advancing
5 filter rod is about to be cut through a double length plug 3' at said location to form said trailing edge 7 and separate the sextuple length, whose leading edge 7 was formed at lines B when this rod position earlier passed said location. The part of Fig.3 to the left of lines B
10 indicates schematically the trailing end of the previously separated sextuple length filter rod, and that to the right of lines B' the leading end of the next to be formed. When a sextuple length filter rod as illustrated is to be used in filter cigarette manufacture
15 it is first cut simultaneously through double length plugs 3' at lines A and A' to give three identical double length filter rods, each having a central double length plug 2' with a cavity 6 at each end closed by a single length plug 3. As previously described, each double
20 length filter rod is then aligned between and joined to two wrapped tobacco rods and cut midway through the double length plug 2' to give two filter cigarettes of the invention. It will be evident that the continuously formed filter rod could be cut initially into other
25 multiple (e.g. double or quadruple or octuple) lengths;

and/or that single length filters as in Fig.1, cut from multiple lengths or directly from the continuously formed filter rod, could be attached individually to single wrapped tobacco rods.

5 Fig.3 shows the perforations 8 of Fig.1, but as explained in connection with Figs.1 and 2, these perforations are optional and may be absent.

Example 1

10 In a specific example of a filter and filter cigarette according to the invention as described with reference to Figs.1 and 2, the filter is 27 mm long and about 25 mm in circumference. The buccal end plug 2 is a 10 mm long non-wrapped acetate (NWA) plug - i.e. a preformed non-wrapped plug of plasticised cellulose
15 acetate filaments gathered and bonded together; it is made of a mixture of two tows from two respective bales, one bale being of 8/39 denier - i.e. 8 dpf (denier per filament) and 39×10^3 total denier - and the other being of 7/34 denier to give a 7-8/73 denier product. A given
20 tow specification can be processed differently to yield plugs of different performances; in this Example the processing is such that the 10 mm plug 2 has a PD of 45 mm.WG with a tar retention of under 35%. The upstream

end plug 3 is a 10 mm long wrapped acetate (WA) plug -
i.e. a preformed wrapped plug of plasticised cellulose
acetate filaments - made from a 9/37 denier tow; it has
a PD of 10.5 mm.WG with a tar retention of about 16%.

5 The filter wrapper is 27 mm long to give a cavity 7 mm
long extending between plugs 2 and 3; it does not have
perforations 8 as shown in Figs.1 and 2 and is of air-
permeable paper to provide for ventilation into cavity 6.
The filter rod is attached by a ventilating tipping
10 overwrap 12 to a commercial wrapped tobacco rod 10, 11.

The tipping overwrap paper has a single ring of
ventilating perforations 14 around cavity 6 so that on
smoking there is ingress of external air laterally
through the overwrap perforations and underlying
15 permeable filter wrapper into the cavity.

EXAMPLES 2 and 3

The filter and filter cigarette of the Examples are
as described above for Example 1, except that in each the
filter length is 25 mm. with 8 mm. long NWA and WA plugs
20 and a 9 mm. cavity, the buccal end NWA plug being made
from a combination of two 8/39 denier tows and having a
PD of 78 mm. WG and a tar retention of 37%, and the
upstream WA plug being of 8/28 tow and having a PD of 12
mm. WG and a tar retention of 16%.

The following Table compares the resulting filter cigarettes of Examples 1 to 3, which are according to the invention, with a commercial "lights" ventilated filter cigarette using the same tobacco rod with a ventilated WA
5 filter. The filters of Examples 1 to 3 each had an overall tar retention of 45%, whereas the comparison commercial filter had a tar retention of 57%.

	Commercial	Example 1	Example 2	Example 3
Filter Length (mm)	27	27	25	25
Filter Construction	WA	NWA + Cavity + WA	NWA + Cavity + WA	NWA + Cavity + WA
Filter Configuration (mm)		10 + 7 + 10	8 + 9 + 8	8 + 9 + 8
Tow Selection - NWA Segment	Not Known	Two bales (8/39 + 7/34)	Two bales (each 8/39)	Two bales (each 8/39)
Tow Selection - WA Segment		9/37	8/28	8/28
Filter PD (mm WG)	90	66	85	85
Cigarette Open PD (mm WG)	94	71	101	91
Ventilation (%)	49	52	59	75
Tar Yield (mg/cig)	6.2	8	8.0	4.3
Nicotine Yield (mg/cig)	0.53	0.66	0.64	0.40
CO Yield (mg/cig)	6.1	4.9	4.2	1.7
CO/Tar Ratio	0.98	0.61	0.52	0.40

5

10

15

Values for product and component parameters (including pressure drop, tar retention, % ventilation, permeability) disclosed herein are all as measured using industry standard (CORESTA) equipment and conditions. Thus pressure drop (draw resistance) is the pressure difference between the two ends of the filter or component concerned at a steady volumetric flow of 17.5 ml/sec, and unless indicated as "open" (measured with ventilation permitted) is measured "enclosed" (encapsulated in the measuring device, with no ventilation). Smoke component (tar, CO, nicotine etc) delivery yields are measured by smoking the cigarette on a standard (Filtrona) smoking machine under standard ISO conditions (puffs, each of 35 ml volume and 2 seconds duration, at one minute intervals), and collecting and analysing the smoke delivered. Filter and filter plug retention efficiencies are calculated by smoking the cigarette with the filter enclosed (no ventilation) and measuring the weight of tar retention by the plug(s) concerned; the tar retention is the ratio, expressed as a percentage, of this weight of tar retained in the used plug(s) to the total weight of said retained tar and delivered tar yield. The percentage ventilation (or air dilution) is the proportion of ventilating air present in the total volumetric flow from the buccal end of the

cigarette; it is measured on the unlit cigarette with said total flow set at 17.5 ml/second; in practice 50% ventilation or air dilution indicates that on smoking each puff will contain an about 50/50 v/v ratio of added ventilating air to original smoke, and 40% ventilation indicates an about 40/60 ratio and so on. The CORESTA (Centre de Cooperation pour les Recherches Scientifique Relatives au Tabac) unit of air permeability is ml/min.cm² under 1 kPa.

- 10 The ISO tests used for parameter measurements herein include :

Tar Yield - ISO 4387 (Cigarettes - Determination of Total and Nicotine-free Dry Particulate Matter using a Routine Analytical Smoking Machine).

- 15 Carbon Monoxide Yield - ISO 8454 (Cigarettes - Determination of Carbon Monoxide in the Vapour Phase of Cigarette Smoke - NDIR Method).

- Paper Permeability - ISO 2965 (Materials used as Cigarette Papers, Filter Plug Wrap and Filter Joining Paper, including
20 Materials having an Oriented Permeable Zone - Determination of Air Permeability).

C L A I M S :

1. A tobacco smoke filter which has a tar retention of at most 50% and comprises a relatively high draw resistance downstream filtering plug of at most 50% tar retention,
5 filter plug of at most 22% tar retention spaced longitudinally upstream therefrom, and a filter wrapper engaging around and joining the spaced plugs to define a cavity therebetween.
- 10 2. A filter according to claim 1 wherein the downstream filtering plug has a draw resistance of from 40 to 130 mm.WG.
3. A filter according to claim 2 wherein the downstream filtering plug has a draw resistance of from 60 to 110
15 mm.WG.
4. A filter according to any preceding claim wherein the downstream filtering plug has a tar retention of from 35 to 45%.
5. A filter according to any preceding claim wherein
20 the upstream filtering plug has a draw resistance of up to 20 mm.WG.
6. A filter according to any preceding claim wherein

the upstream filtering plug has a draw resistance of to
8 to 16 mm.WG.

7. A filter according to any preceding claim wherein
the upstream filtering plug has a tar retention of from
5 14 to 20%.

8. A filter according to any preceding claim wherein
the filter wrapper is a ventilating wrapper.

9. A filter according to claim 8 wherein the filter
wrapper is of air-permeable material and/or has one or
10 more ventilating apertures in register with the cavity.

10. A filter cigarette comprising a filter according to
any preceding claim joined at its upstream end to a
wrapped tobacco rod, a pathway being provided for the
passage of external ventilating air laterally into the
15 cavity.

11. A filter cigarette according to claim 10 wherein
filter and wrapped tobacco rod are joined by ring
tipping.

12. A filter cigarette according to claim 10 wherein
20 filter and wrapped tobacco rod are joined by a full
tipping overwrap, the filter wrapper and overwrap

together providing a pathway for external ventilating air to pass laterally therethrough into the cavity.

13. A filter cigarette according to claim 12 wherein the filter wrapper is of air-permeable material and the
5 tipping overwrap has one or more ventilating apertures in register with the cavity.

14. A filter cigarette according to claim 12 wherein the tipping overwrap has one or more ventilating apertures in register with one or more ventilating apertures in the
10 filter wrapper and with the cavity.

15. A filter cigarette according to any of claims 10 to 14 having a CO delivery of less than 5 mg. and a CO/tar delivery ratio of less than 0.7.

16. A multiple length filter rod comprising a plurality
15 of filters according to any of claims 1 to 9 joined integrally end-to-end in mirror image relationship.

SMOKERS FILTER

ABSTRACT OF THE DISCLOSURE

A tobacco smoke filter which has a tar retention of at most 50% and comprises a relatively high draw resistance downstream filtering plug of at most 50% tar retention, a relatively low draw resistance upstream filter plug of at most 22% tar retention spaced longitudinally upstream therefrom, and a filter wrapper engaging around and joining the spaced plugs to define a cavity therebetween.

1/2

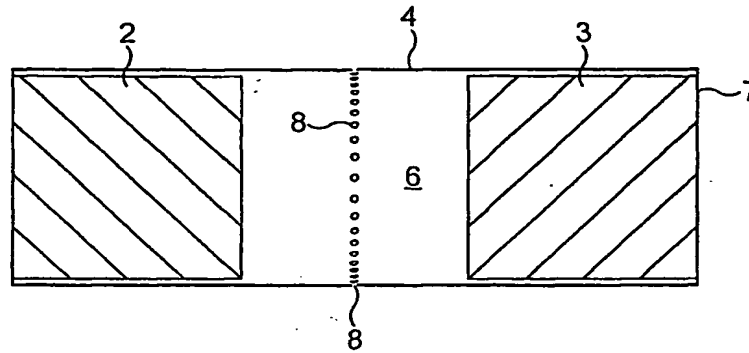


FIG. 1

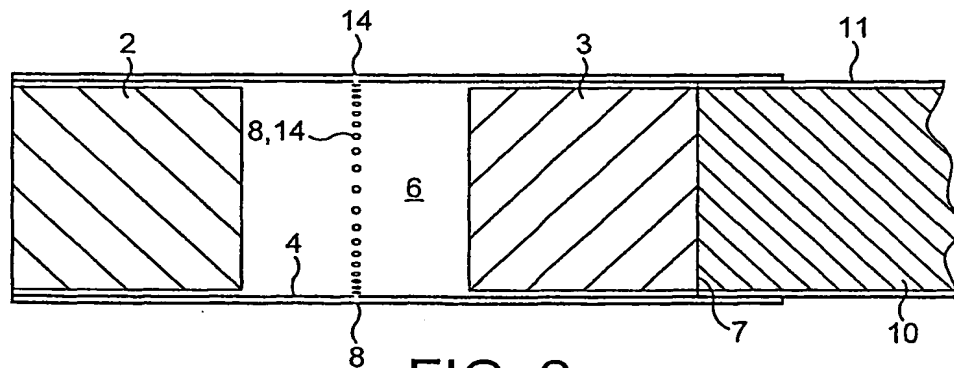


FIG. 2

2/2

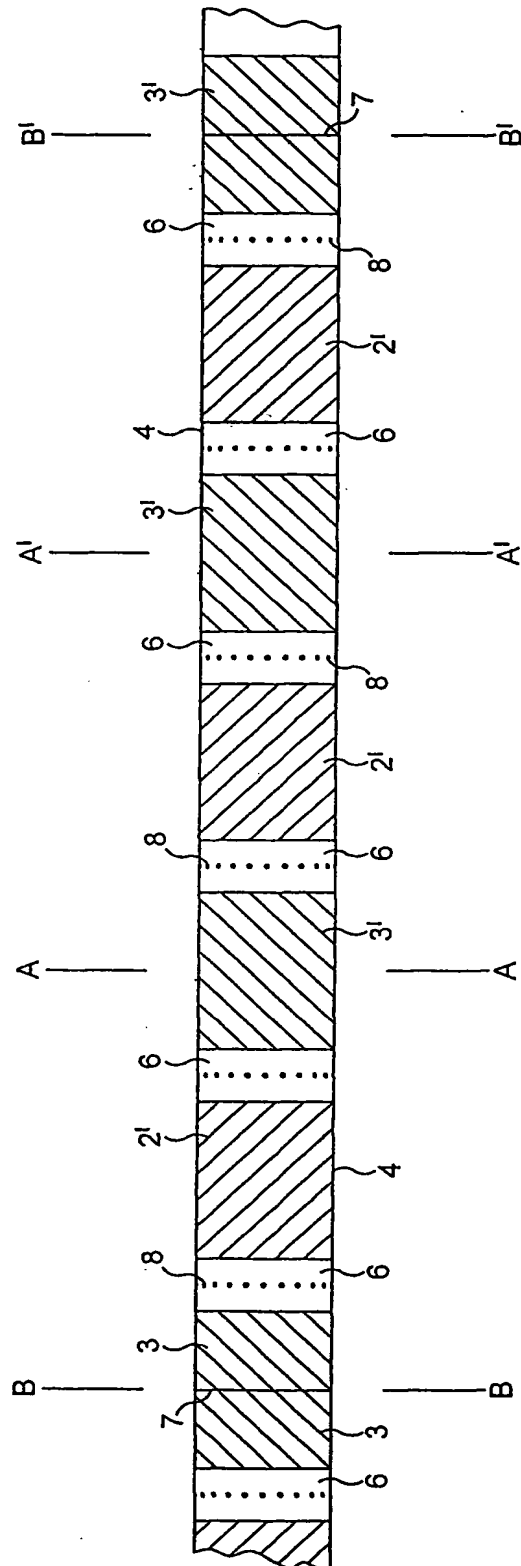


FIG. 3